

INSTALLATION INSTRUCTIONS

EVINRUDE G2 150HP 10-103


MotorMate
Tow with confidence

CONFIRM "A" MEASUREMENTS PRIOR TO INSTALLATION

It is necessary to confirm the spacing of the contact points on the outboard motor are the same as "A".

"A" MOTOR YOKE SPACING

The motor yoke spacing is the **center-to-center** distance between the motor contact points that secure the MotorMate to the motor drive shaft housing.

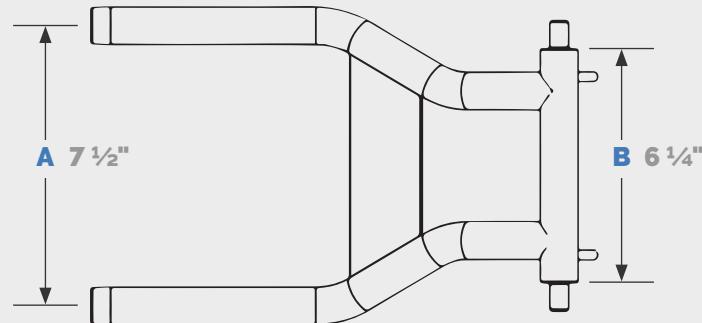

"B" TRANSMOM MOUNT SPACING

The transom mount spacing is measured **between the inside edges** of the stern brackets.



PACKAGE CONTENTS



- 1 Raise motor and straighten before engaging the MotorMate.



- 3 Lower motor very slowly and stop approximately one inch away to make sure MotorMate End Caps are aligned with the contact points on the motor.

- 4 Example of the recessed areas containing the contact points where the MotorMate End Caps secure the motor and where the outboard motor center-to-center measurements are made.

- 5 Continue lowering the motor while aligning the MotorMate End Caps with the motor contact points until the motor is securely held in place.

The cover around the motor contact points may be damaged and/or cracked by improper installation or use. MotorMate is not responsible for any damage to the MotorMate unit or any part of the motor due to improper installation or use.



Contact us for more information or assistance with installation.

1-844-668-6768

motormateusa.com

[Motormate](#)



REV:4.16.2020

LIMITED WARRANTY

EVINRUDE G2 150HP 10-103



EPCO Products, Inc., (EPCO) warrants the MotorMate Outboard Motor Locking System to be free from defects in materials or workmanship for the limited lifetime of the MotorMate. This warranty is granted to the original purchaser of the MotorMate unit. This warranty does not cover any MotorMate unit that has been modified in any way or if it is used with a motor for which it was not originally designed nor specified. This warranty does not cover damage, loss or failure which results in whole or in part from improper installation, misuse, neglect, failure to properly maintain, or other damage caused by inappropriate handling or use of, the MotorMate.

This warranty is limited to repair or replacement of the defective MotorMate in the sole and exclusive discretion of EPCO. This warranty does not cover, and no claim shall be made hereunder for, consequential damages, secondary charges, incidental damages, labor, installation costs or expenses, or losses or liability to third parties for personal injury or property damage proximately resulting from defects in the MotorMate.

ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, ARE EXCLUDED AND DISCLAIMED, EXCEPTING ONLY THE EXPRESSED WARRANTIES SPECIFICALLY SET FORTH IN THIS LIMITED WARRANTY.

Breach or failure under the foregoing warranty shall not be grounds to rescind any agreement under which the MotorMate has been purchased or to claim set off or other remedies against EPCO or any other party as a result of such breach or defect.

In order to make a claim under this warranty, the owner of the MotorMate must provide written notice of specific defects to EPCO promptly, and in no event more than thirty (30) days, after discovery of such defect. The owner may return a defective MotorMate only upon receipt of written return authorization from EPCO.



EPCO Products, Inc.

3736 Vanguard Drive, P.O. Box 9250
Fort Wayne, IN 46899-9250

1-844-668-6768

epcomarineproducts.com

Purchased From: _____ **Date:** _____

Installation Date: _____

Staple receipt to warranty and retain for purchaser/owner documentation purposes.